
Install Guide



 **weboost**



Get ready for a great signal.


Follow these easy steps and EQO will be boosting your signal in no time. EQO technology - the solution for a strong, reliable cell signal.

For more information refer to our **Full Install Guide** at:


install.weboost.com/eqo

HOW DOES EQO WORK?

eqo receives a cell signal from the tower, amplifies it, and sends it over coax cable to the antenna. The antenna broadcasts the amplified signal making it available to devices in the home.

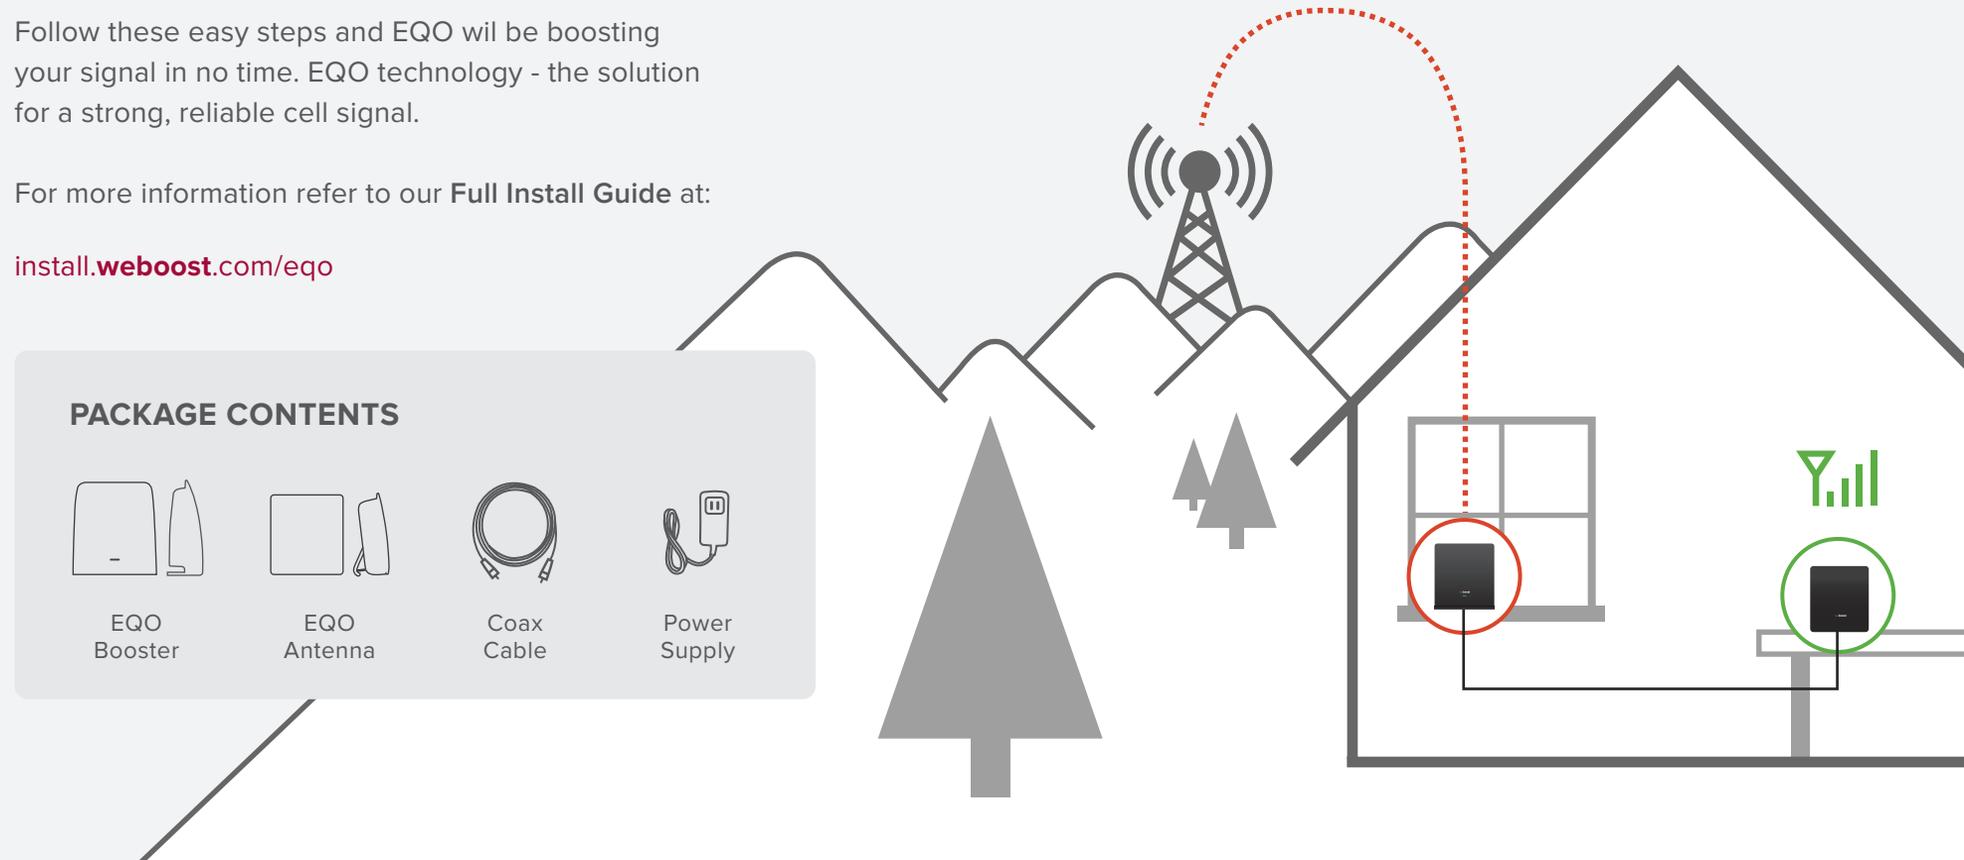

PACKAGE CONTENTS



EQO
Booster



EQO
Antenna



Coax
Cable



Power
Supply

Quick Install Guide

For optimal signal boost, place the EQO booster in the room of your home that has the strongest cell signal.

HOW TO MEASURE YOUR CELL SIGNAL



Place your phone in test mode so the numerical signal strength can be read. For help in finding the test mode for your phone please go to:


weboost.com/us/test-mode-instructions/

Please refer to our **Full Install Guide** for more options on how to properly install your booster: install.weboost.com/eqo




Step 1

Place your **Booster** in the area with the strongest cell phone signal. The LED light should be facing into the room.

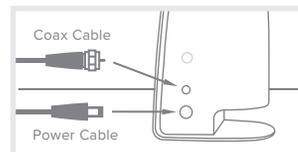


Step 2

Connect the supplied **Coax Cable** and **Power Supply** on the side of the Booster.

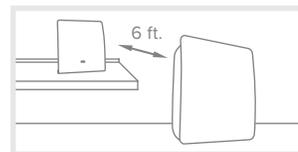

Step 3

Place the **Antenna** where you need to boost your signal. It should face the same direction as the Booster and stand **at least 6 feet away from it**.

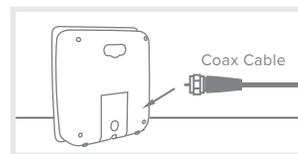

Step 4

Connect the other end of the Coax Cable to the Antenna.



Step 5

Connect the **Power Supply** to a surge protected AC power strip with **at least 1000 Joule rating**.

Congratulations! Once your booster is running, please allow some time for your phone to adjust to your new signal.

Read more about it here at weboost.com/us/test-mode-instructions/

You are almost there.

Please register your product.

Take a moment to register your new product at our website:

register.weboost.com

Registering is quick and easy. It only takes 2 minutes.
Your information is secure with us.

WHAT COLOR IS YOUR LIGHT?



weboost

Booster is operating seamlessly



weboost

Booster is too close to the Antenna. Try increasing the distance.



weboost

Booster is too close to an external signal. Try changing its location.

FOR ADDITIONAL INFORMATION PLEASE REFER TO OUR FULL INSTALL GUIDE



ANY QUESTIONS?

Contact our U.S. Based Customer Support



support.weboost.com




866-294-1660

MON - FRI: 6AM to 7PM MST | SAT - SUN: 8AM to 5PM MST



This device may be operated **ONLY** in a fixed location for in-building use. The signal booster unit is designed for use in an indoor, temperature controlled environment (> 150 degrees Fahrenheit)



IMPORTANT NOTICE: Connect your EQO Booster AC Power Supply to a surge protected AC power strip with at least a 1000 Joule rating. Failure to do this will void your warranty in the event of a power surge or lightning strike.