

Amplifier Installation Guide



Mobile Wireless
iDEN
Amplifier

Contents:

Guarantee and Warranty	1
How it Works	2
Before Getting Started	3
Installing a Wilson Outside Antenna	4
Installing a Wilson Amplifier	5
Installing the Low-Profile Antenna	6
Powering Up a Wilson Amplifier	7
Warnings and Recommendations	8
Understanding the Amplifier Lights	9
About Wilson Electronics	10
Amplifier Specifications	Back Cover



Warning: This manual contains important safety and operating information. Please read and follow the instructions in this manual. Failure to do so could be hazardous and result in damage to your amplifier.

30-Day Money-Back Guarantee

All Wilson Electronics products are protected by Wilson's 30-day money-back guarantee. If for any reason the performance of any product is not acceptable, simply return the product directly to the reseller with a dated proof of purchase.

1-Year Warranty

Wilson Electronics amplifiers are warranted for one (1) year against defects in workmanship and / or materials. Warranty cases may be resolved by returning the product directly to the reseller with a dated proof of purchase.

Amplifiers may also be returned directly to the manufacturer at the consumer's expense, with a dated proof of purchase and a Returned Material Authorization (RMA) number supplied by Wilson Electronics. Wilson shall, at its option, either repair or replace the product. Wilson Electronics will pay for delivery of the repaired or replaced product back to the original consumer.

This warranty does not apply to any amplifiers determined by Wilson Electronics to have been subjected to misuse, abuse, neglect, or mishandling that alters or damages physical or electronic properties.

RMA numbers may be obtained by phoning Technical Support at 866-294-1660.

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of this device.

Disclaimer: The information provided by Wilson Electronics, Inc. is believed to be complete and accurate. However, no responsibility is assumed by Wilson Electronics, Inc. for any business or personal losses arising from its use, or for any infringements of patents or other rights of third parties that may result from its use.

Copyright © 2007 Wilson Electronics, Inc. All rights reserved.

Installation Instructions for the Following Wilson Amplifiers:

Mobile Wireless Single Band Amplifier

Model #804002

FCC ID: PWO806WV

IC: 4726A-806WV

The term "IC" before the radio certification number only signifies that Industry Canada technical specifications were met.

Inside this Package



Wireless amplifier



DC plug-in power cable



Low-profile antenna

How it Works


Your new Wilson amplifier has been carefully engineered to significantly improve the performance of your cell phone or cellular data card in mobile applications. Together with an outside antenna (sold separately), the amplifier's state-of-the-art technology is designed to increase your signal up to 10 times, reduce disconnects and dropouts, and increase data communication rates needed for 3G technologies.

The outside antenna will collect the cell tower signal and send it through the cable to the amplifier. The signal is then boosted and sent to the inside antenna. Your cell phone or data card then communicates with the improved signal. When the cell phone or data card transmits, the signal goes through the inside antenna, is boosted by the amplifier and broadcast back to the cell tower through the outside antenna.

Wilson Electronics manufactures a wide variety of antennas to help you customize your amplifier for your specific application. Several are shown below. See your dealer or visit www.wilsonelectronics.com.


Before Getting Started

NOTE: Use of this amplifier with an antenna gain higher than 5.12 dBi is in violation of FCC regulations for which the offender is fully liable. All Wilson mobile antennas are 5.12 dBi or less in the 800 MHz band.

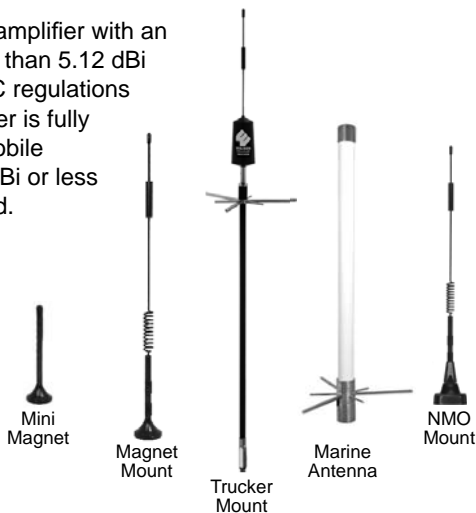

Before Getting Started

This guide will help you properly install Wilson's single-band, mobile wireless amplifier. **It is important to read through all of the installation steps for your particular application prior to installing any equipment.** Read through the instructions, visualize where all the equipment will need to be installed and do a soft installation before mounting any equipment. If you do not understand the instructions in full, seek professional help, or contact Wilson Technical Support at 866-294-1660.

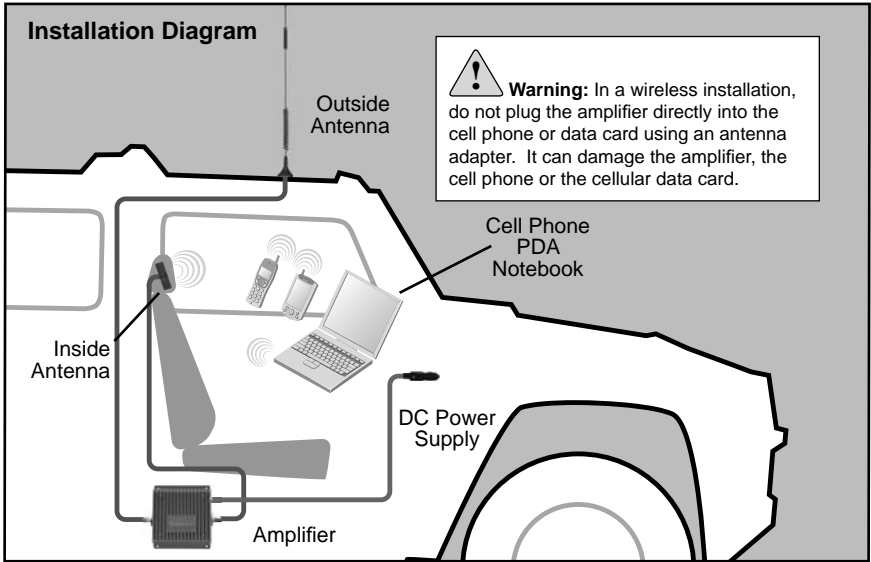

Installing a Wilson Outside Antenna

To receive the best cell signal, select a location in the center of the vehicle's roof at least 12 inches away from any other antennas and free of obstructions.


Follow the specific antenna installation instructions included with the outside antenna (sold separately).



Warning: The outside antenna must be installed with a separation of at least 20 inches from any of the vehicle's occupants or nearby persons and must not be located or operating in conjunction with any other antenna or amplifier.




Warning: Do not use any type of glass-mount antenna with this amplifier. The outside and inside antennas must be shielded from each other to prevent oscillation.

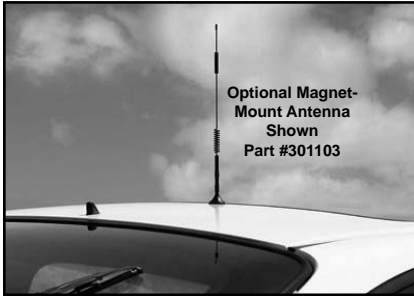

The outside antenna must be installed vertically. Signal performance will be degraded if the antenna is not vertical.

The antenna cable may be run through the door to the amplifier.

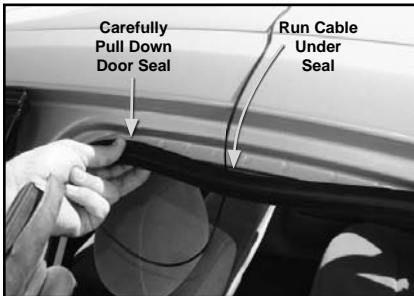

For a more professional-looking installation, the antenna cable may be run under the door seal. Carefully pull down the door seal. Run the cable through the seal and push the seal back into place. This prevents constant wear and tear on the cable as the door opens and closes.



The antenna cable is small enough to easily tuck under the door seal or plastic molding.

Installing a Wilson Amplifier



Warning: Do not plug in the DC power supply until the outside and inside antenna cables are attached to the amplifier.



Select a location to install the amplifier that is away from excessive heat, direct sunlight or moisture and that has proper ventilation.

Recommended installation locations are:


- Under the seat
- Under the dash

Run the cable from the outside antenna and attach it to the FME-Male connector labeled "outside antenna" on the amplifier.



Attach the inside antenna cable to the FME-Male connector labeled "inside antenna" on the amplifier.

Installing the Low-Profile Antenna

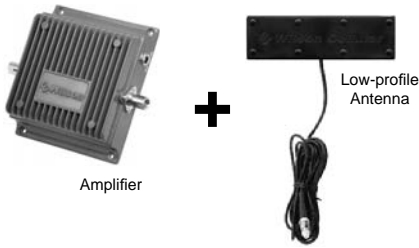

Install the low-profile inside antenna 8-12 inches from where the cell phone or cellular data card will be used.



Warning: Do not install the low-profile antenna within four inches of metal. (Metal found inside the vehicle's seat will not affect the antenna's performance.)



Place the inside antenna on the side of the driver's seat for maximum performance.

Install the inside antenna at least eight inches, but not more than 12 inches, from where the cell phone or cellular data card will be used.



Install the inside antenna at the same angle as the cell phone when held in use, or place next to the laptop's cellular data card. This will maximize the signal strength.




For a more professional-looking installation, the low-profile antenna may be slid under the seat cover or leather, high on the driver's seat.



Warning: The inside antenna must be installed with a separation of at least eight inches from all persons and must not be located in conjunction with any other antenna or amplifier.

Powering up a Wilson Amplifier

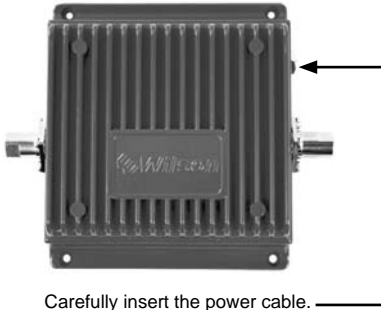

Carefully insert the power cable.

Make sure both the outside and inside antenna cables are connected before powering up the amplifier.

Connect the DC plug-in power supply cable to the amplifier marked "Power" and insert the large end into DC power socket (the cigarette lighter outlet.)



Warning: Use only the power supply cable provided in this package. The power supply must be 12 V DC.



IMPORTANT: Do not power up the amplifier unless antenna cables are attached to amplifier.


The amplifier may remain on all the time. However, leaving the amplifier on in a vehicle when it is not running can discharge the battery in a day or two.

A good option is to power the amplifier through the ignition switch so the amplifier is turned on and off with the vehicle.





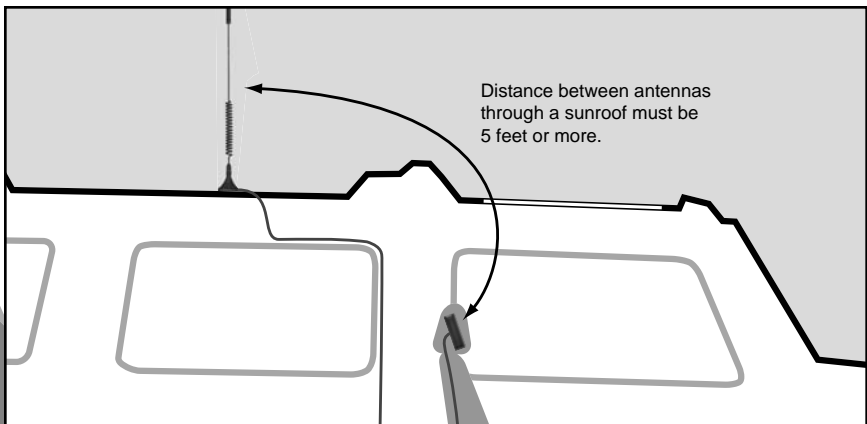

NOTE: The aluminum casing of a Wilson amplifier will adjust very quickly to the ambient temperature of its environment. For example, in the summer, when the inside of a car can reach 140 degrees Fahrenheit, the amplifier temperature may be 150 degrees or higher. The casing will be hot to the touch, similar to a metal door handle or a steering wheel. Such high temperatures will not damage the amplifier, nor do they pose a fire risk to the vehicle. As recommended in these instructions, install the amplifier in a location with adequate ventilation, such as under the seat, in the trunk or under the dashboard. Keep the area free of items that could block air flow to the amplifier.

Separation of inside and outside antennas is very important. The metal roof of the vehicle acts as a barrier and helps shield the two antennas from each other, preventing oscillation.

If the vehicle has a sunroof, it is important to separate the inside and outside antennas by at least five feet. This prevents the amplifier from overloading or oscillating.



Warnings and Recommendations

-  Warning: In a wireless installation, do not plug the amplifier directly into the cell phone or cellular data card using an antenna adapter. It will damage the amplifier, the cell phone or the cellular data card.
-  Warning: Do not install the inside antenna within four inches of metal. (Metal found inside the vehicle's seat will not affect antenna performance.)
-  Warning: Do not use any type of glass-mount antenna with this amplifier. The outside and inside antennas must be shielded from each other to prevent oscillation.
-  Warning: Do not plug in the DC power supply until the outside and inside antenna cables are attached to the amplifier.
-  Warning: **RF Safety:** The inside antenna must be installed with a separation of at least eight inches from all persons and must not be located in conjunction with any other antenna or amplifier.
-  Warning: **RF Safety:** The outside antenna must be installed with a separation of at least 20 inches from any of the vehicle's occupants or nearby persons and must not be located or operating in conjunction with any other antenna or amplifier. All roof-mount antennas should be centrally located on the roof of the vehicle. Mirror-mount antennas should be at least six inches from the ground and leave at least 20 inches of separation from any persons near or around the vehicle. Use of a cellular amplifier with an antenna gain higher than 5.12 dBi is in violation of FCC regulations for which the offender is fully liable. All Wilson mobile antennas are 5.12 dBi or less in the 800 MHz band.

Recommended amplifier installation locations are:

- Under the seat
- In the trunk
- Under the dash


Install the low-profile antenna 8-12 inches from where the cell phone or cellular data card will be used.

Power the amplifier through the ignition switch so the amplifier is turned on and off with the vehicle.

If the vehicle has a sunroof, it is important to separate the inside and outside antennas by at least five feet. This prevents the amplifier from overloading or oscillating.

Understanding the Amplifier Lights

Power Indicator Light
(located on the side)

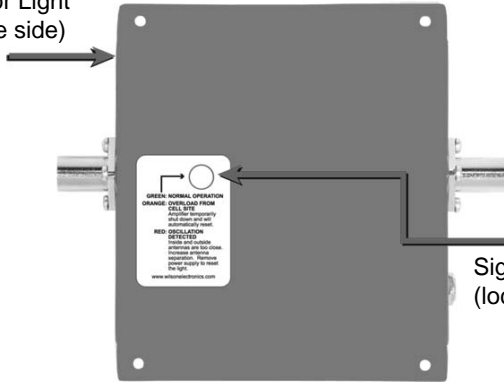

Power Indicator Light

Shows green when the unit is turned on.

Signal Indicator Light

If the amplifier is powered up and the light is off, this indicates the unit is working properly.

If the light is red, the amplifier has shut down because the signal from the cell site is adequate and amplification is unnecessary.

About Wilson Electronics



Wilson Electronics, Inc. has been a leader in the wireless communications industry for 40 years. The company designs and manufactures amplifiers, antennas and related components that significantly improve cellular telephone signal reception and transmission in a wide variety of applications, both mobile and in-building.

With extensive experience in antenna and amplifier research and design, the company's engineering team uses a state-of-the-art testing laboratory, including an anechoic chamber and network analyzers, to fine-tune antenna designs and performance. For its amplifiers, Wilson uses a double electrically insulated RF enclosure and cell site simulators for compliance testing.

All products are engineered and assembled in the company's 50,000-square-foot headquarters in St. George, Utah. Wilson has product dealers in all 50 states as well as in countries around the world.

Amplifier Specifications

Part Number	804002
Frequency	806-866 MHz
Gain (Rx/Tx)	40 dB / 40 dB
Max Output Power	3 watts
Max RF (up/down)	+35 dBm / +10 dBm
Noise Figure	4 dB nominal
Flatness (up/down)	± 3 dB / ± 3 dB
Isolation	> 90 dB
Power Requirements	11 V, 0.5-1.5 A max
Connectors	FME-Male 50 ohms
Dimensions	5.5 x 4.3 x 1.4 (inch) / 14.0 x 10.8 x 3.5 (cm)
Weight	1.32 lbs / 0.6 kg



3301 East Deseret Drive, St. George UT 84790

For additional Technical Support visit

www.wilsonelectronics.com

Phone: 866-294-1660

Fax: 435-656-2432